

Push-pull heat recovery unit with Wi-Fi module

HRU-WALL-WI



Description

HRU-WALL-WI model ductless heat recovery unit comes equipped with a WiFi module. Its basic parameters, including max. heat recovery 82%, airflow rate 60 m³/h, and low sound power level 38 dB (A), are identical to those of the HRU-WALL units.

Methods for pairing devices and controlling them are different. With the addition of a Wi-Fi module, the device can be connected to a local wireless network and controlled via a mobile app. Moreover, the app allows the pairing of devices by assigning two or more heat recovery units to a group. It is possible to have many groups so that 1 application can serve all HRV units in a building.


A temperature sensor and relative humidity sensor are built into the HRU-WALL-WI, and the app displays their values.

Product code example

Product code: **HRU-WALL-WI - 150 - 60**


type	_____
diameter	_____
capacity	_____

Dimensions

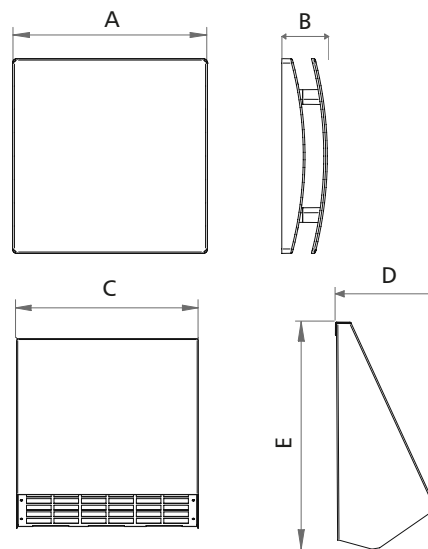

External hood

Type	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
HRU-WALL-WI-150-60	218	51	252	114	262

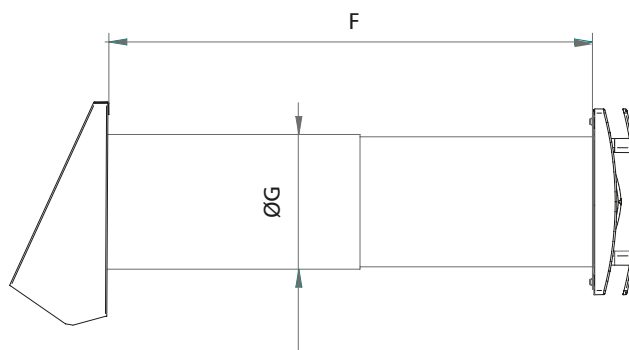


Type	F [mm]	G [mm]
HRU-WALL-WI-150-60	300÷560	158

Push-pull heat recovery unit with Wi-Fi module

HRU-WALL-WI

Design of the single-room heat recovery unit

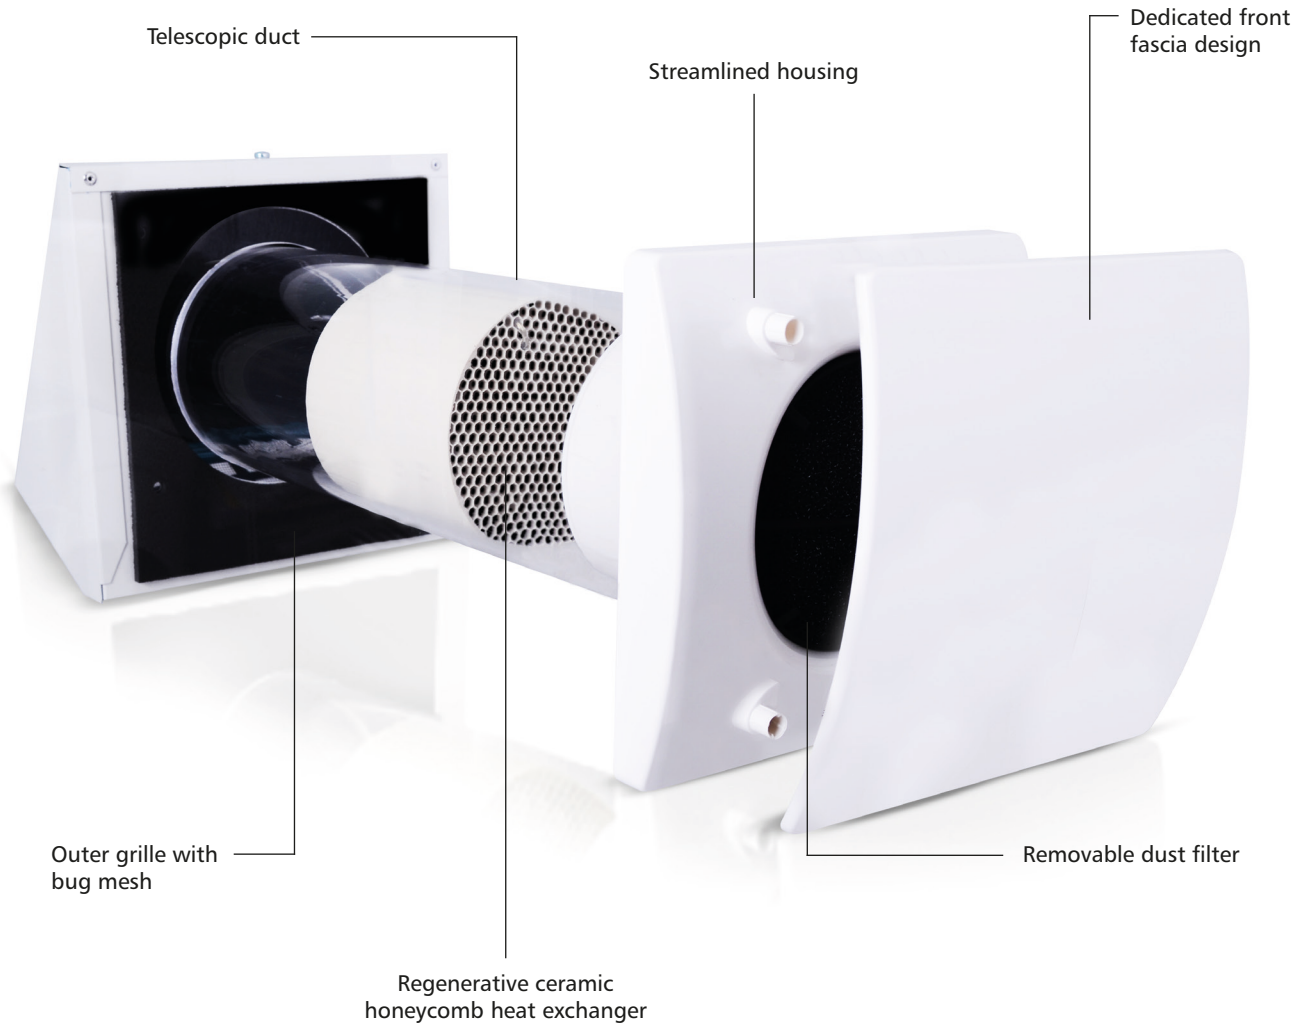

Note!
Power cord is not included.

Intended use

Single-room heat recovery ventilation is most effective when two units are mounted in two opposite rooms, both units assigned to the same group in the application. The above configuration allows devices to be synchronized for alternate operation (while one unit supplies air, the other extracts). Synchronization is completely wireless (WiFi), which minimizes installation costs.

Example temperature values for the 2nd air supply speed


Indoor temp. [°C]	Outdoor temp. [°C]	Air supply temp. [°C]
20	0	17.4
20	-10	16.1
20	-20	14.8

*Supply air temperature measured at the 2nd speed

Push-pull heat recovery unit with Wi-Fi module HRU-WALL-WI


Control

The HRU-WALL-WI unit can be controlled with an Android or iOS phone or tablet. HRU-WALL-CONTR-I wired controller and HRU-WALL-RC IR remote controller are not supported in this version. Through Wi-Fi, all ventilation units are connected to the local network, assigned to groups (rooms) or controlled individually. As with standard controllers, this app allows users to adjust speeds and directions of airflow (heat recovery mode or supply/extract mode only). In addition, you can use the timer (boost for a short period) as well as read the temperature and relative humidity. A statistical distribution of recently measured humidity is also displayed in the app.

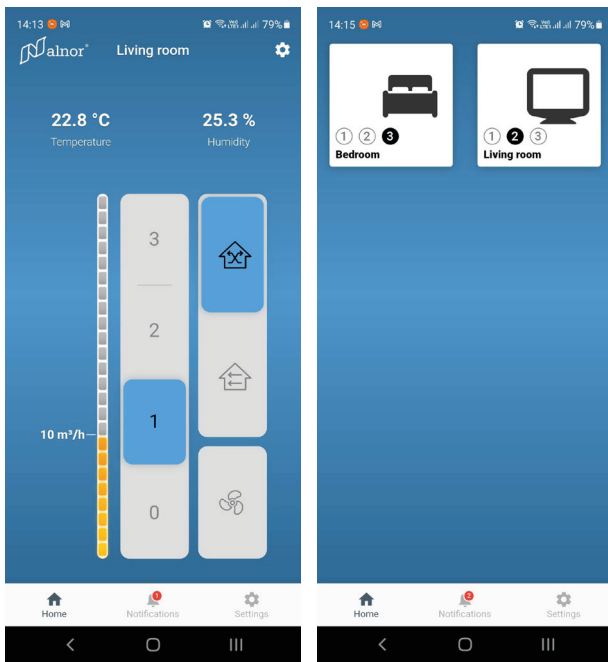

Energy class

Model	Sound power level [dB]	Air flow rate [m³/h]	Energy class
HRU-WALL-WI-150-60	38	60	A

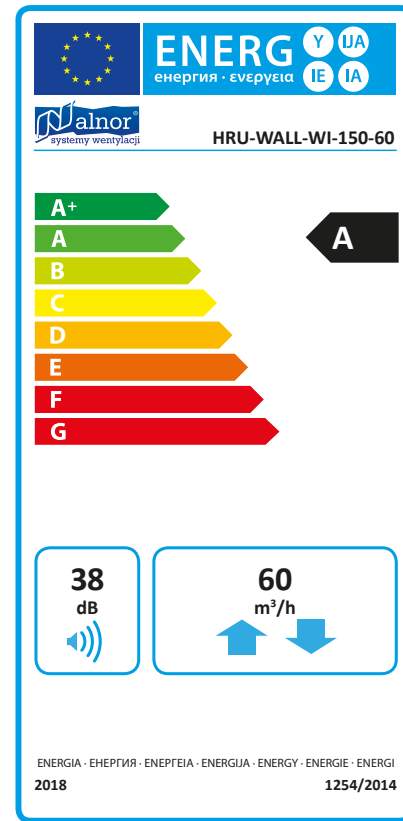

Technical specifications

Type	Air flow rate [m³/h]	Power [W]	Sound pressure [dB(A)] 3 m	Efficiency [%]	Ambient temp. [°C]	Weight [kg]
HRU-WALL-WI-150-60	20/40/60	1.4/2.3/3.8	10/18/26	-20° +50°	74	4.3

Air efficiency measured as per ISO 5801:2008
 Heat recovery efficiency as per EN 13141-8:2011
 Sound level measured as per ISO 3746:2010