BORAX

AC AXIAL IN LINE DUCT FAN

BORAX fans are perfect for in-line ventilation applications. Protection gril prevent materials reach to blade, provides safe working.

MATERIAL	: Electrostatic Powder Coated impeller is made of sheet steel.Housing is galvanized sheet steel.
INSULATION CLASS	: Class B
DIRECTIVE	: EN 60335-1, EN 60335-2-80
SPEED CONTROL	: Speed can be adjusted using an optional controller.
APPLICATION AREAS	: Electrical Panel Cooling ,UPS systems, deep-freezers, cooling welding machines, residential ventilations etc.

Technical Drawings

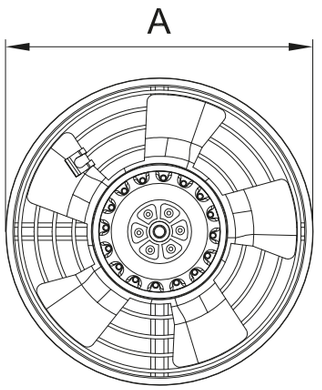

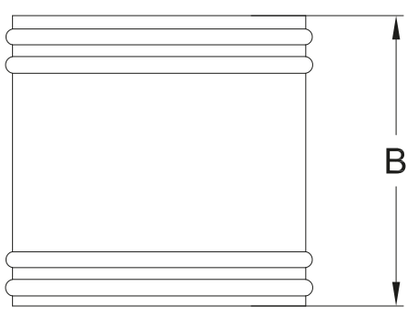

Accessories

BSC

TYPE	A	B
BORAX 200-2K	200	200
BORAX 250-2K	250	250
BORAX 300-2K	300	250
BORAX 350-2K	355	250

Dimensions are in (mm)

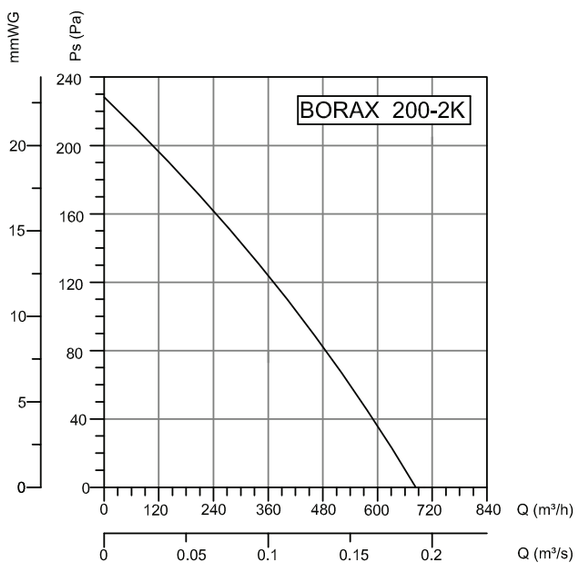

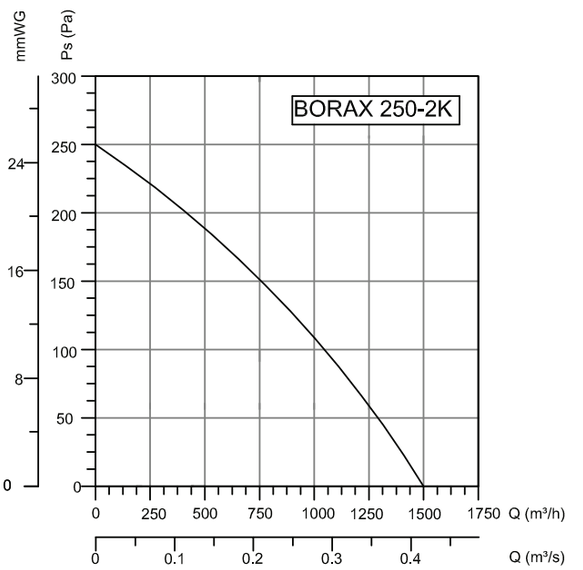

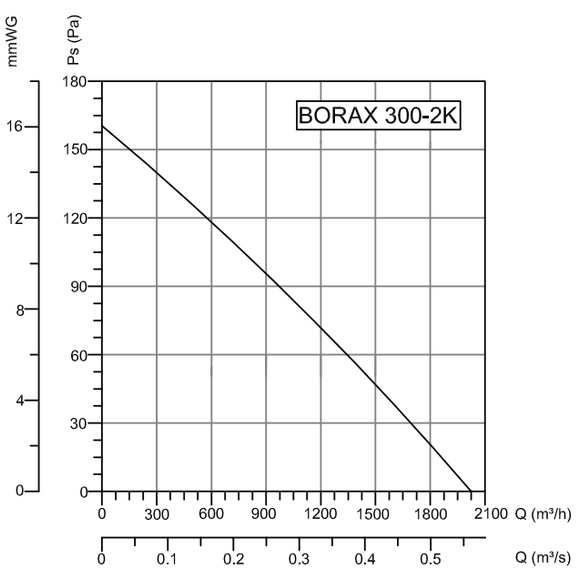

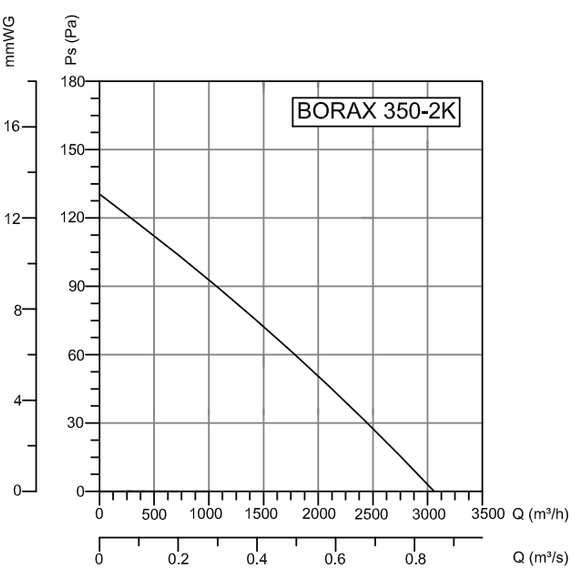

TYPE	VOLTAGE V	FREQUENCY Hz	POWER KW	CURRENT (A)	CAPACITOR (µF)	SPEED d/d	AIR FLOW m^3/h	SOUND PRESSURE LEVEL dB(A)	WEIGHT kg
BORAX 200-2K	230	50	70	0,3	2,5	2650	680	50	2,7
BORAX 250-2K	230	50	100	0,46	4	2700	1500	52	3,6
BORAX 300-2K	230	50	163	0,63	5	2550	2025	54	4,6
BORAX 350-2K	230	50	240	1,1	5	2250	3110	58	5,6